

ENVI-Replacement Filters for Filterbags

EnviSuperPleat™ – The right changeout for Needlefeltsbags



Applications: Weldingfume – shot-blasting – CHEMICAL – FOOD – POWDERCOATING – POWER-PLANTS – and many other possibilities.

Advantages

- Triple filterarea @ lower pressure loss (m³/m²/h).
- Reduced cleaning cycles due to increased surface area.
- Improved filtration efficiency through spundbonded filtermaterials.
- Can be installed in your existing dustcollector without any changes.
- EnviSuperPleat™ fits your existing dustcollector without any changes.



Features

- ANTISTATIC (ATEX).
- PTFE COATING (oil and water-repellent).
- PTFE MEMBRANE (high filtrationefficiency).
- HIGH TEMPERATURE Applications (Max 260°).




Industrivej 4 · DK-6622 Baekke · Denmark

Tel. +45 7538 9666 · Fax +45 7538 9667 · info@envi-filter.com · www.envi-filter.com

ENVI-Replacement Filters for Filterbags

Pressure loss (Delta P) comparison between a standard Polyester needlefelt and a ENVI-FILTER media.

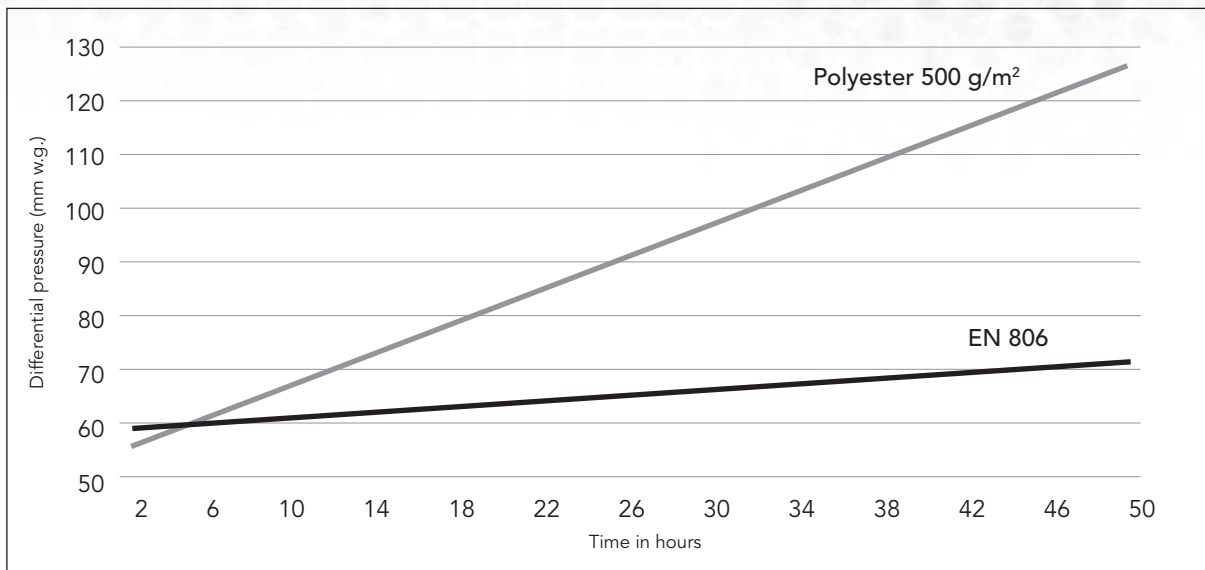

Comparison between standard needlefelt and ENVI-SuperPleat™ media


Envi-superpleat filter bags can easily be mounted in an existing dust collector without any changes.

The advantages of using the envi-superpleat are:

That you obtain more surface area, which intern gives you a significantly lower pressure drop across the filter.

The abrasion of the filter is reduced due to a shorter element.

The element is designed with a low pleat depth and wide pleat spacing which enables the dust to be pulsed off very efficiently.

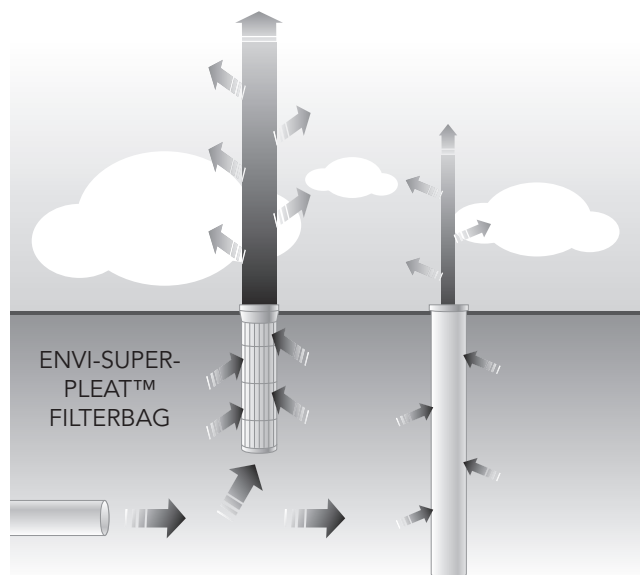

Industrivej 4 · DK-6622 Baekke · Denmark

Tel. +45 7538 9666 · Fax +45 7538 9667 · info@envi-filter.com · www.envi-filter.com