

ENVI-FILTER Cartridges Type 1 Polyester/Polypropylene/Cellulose

ENVI-FILTER type 1 cartridges are constructed with a steel flange and are available in a range of sizes.



We are also able to offer plastic flanges and special sizes upon request.

ENVIFILTER cartridges can be used in a number of applications.

ENVIFILTER cartridges can be constructed to operate in temperatures up to 200° C.

ENVIFILTER cartridges can be manufactured with Polyester media, cellulose (paper) or Polypropylene. We are able to offer these in Ryton and Nomex as well.



Features

- ANTISTATIC (ATEX)
- PTFE COATING (oil and water repellent)
- PTFE MEMBRANE (high filtration degree)
- HIGH TEMPERATURE applications.

ENVIFILTER CARTRIDGES fit into most existing filter units such as DCE/TORIT, SULT, and many others.




ENVI-FILTER Cartridges Type 1

Polyester/Polypropylene/Cellulose



Technical data

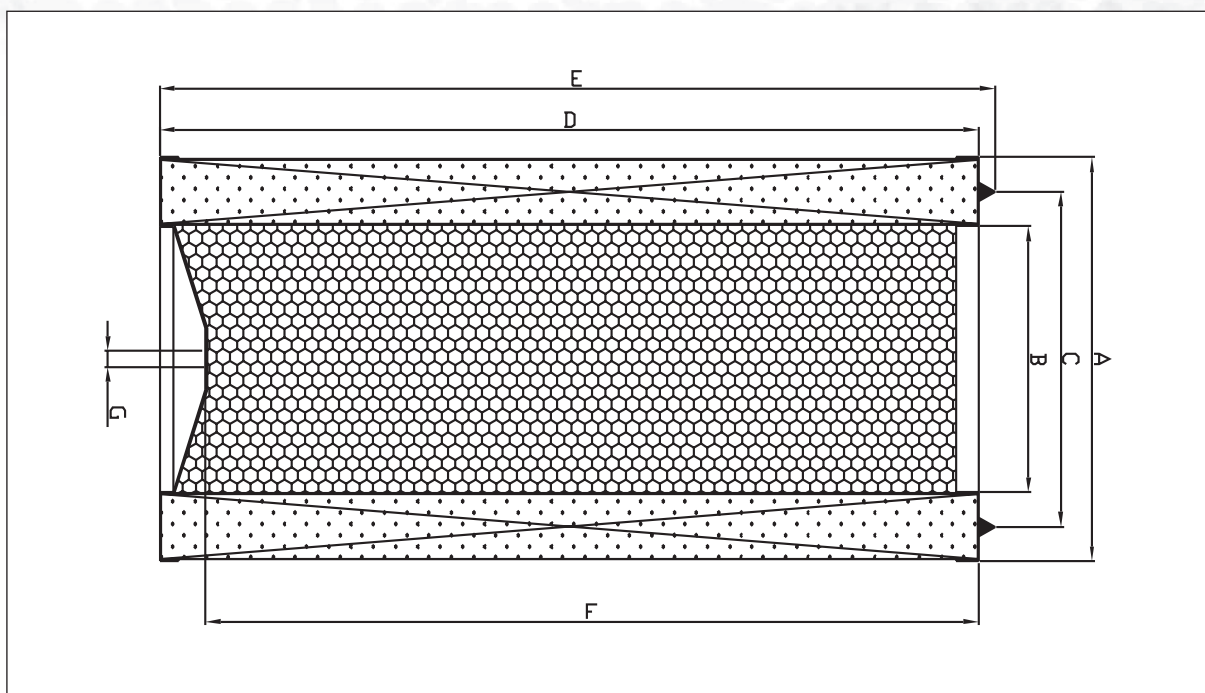

Ø mm	A Ø mm	B Ø mm	C mm	D mm	E mm	F mm	G mm	Pleat depth
150	150	85	127	150-1200->2000	D+13	D-38	8-13	28
205	205	90	145	150-1200	D+13	D-38	13	28/48
225	216	143	185	150-1200->2000	D+13	D-38	8-13	28
305	305	190	248	150-1200	D+13	D-38	13	48
325	325	216	275	150-1200->2000	D+13	D-38	13	28/48
351	351	241	299	150-1000	D+13	D-38	13/18	48
445	445	335	390	150-1000	D+13	D-38	13/29	48
570	570	460	515	150-1000	D+13	D-38	13/29	48



Industrivej 4 · DK-6622 Bække · Denmark

Tel. +45 7538 9666 · Fax +45 7538 9667 · info@envi-filter.com · www.envi-filter.com